


Only Stanley offers you all the benefits in an Expandable Steel Frame

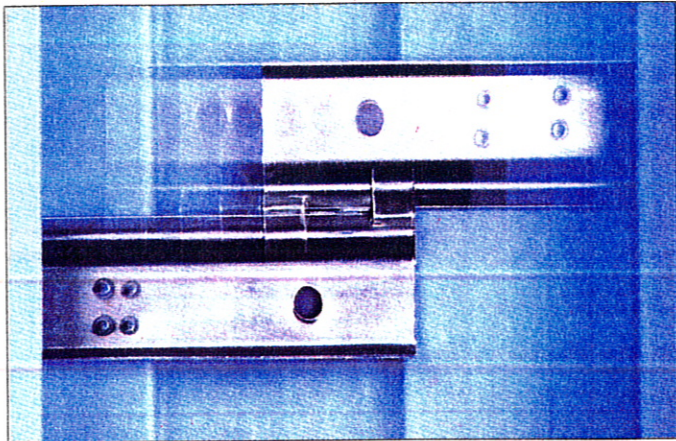

(The patented slider mechanism operates smoothly and positively).

Specifications:

Heights: 6'8" and 7'0" **Widths:** 2'0" to 6'0"
(standard Widths)

Rabbet: 1-3/4"

Fire Rating: 90 minute (W.H.I) for single and double openings

Machining: prepared for 3 x 4-1/2" screw-on butts and single 2-3/4" T-strike for self tapping screws. ANSI 4-7/8" prep. available as option. Deadlock strike and closer or panic reinforcing optional.


Finish: hot dipped galvanized 18 g steel.

Anchoring System: 14 x 2-1/2" #8 drywall screws

Rough openings: door width plus 1-3/4", door height plus 2" from finished floor

Patents: Canadian #1129253, USA #4395885

DISTRIBUTED BY:

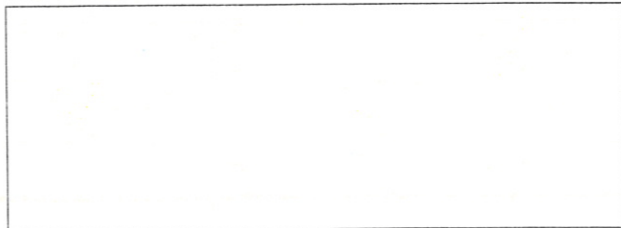

Fully Expandable & Reversible

Over 3" of expansion fits any wall thickness from 4-1/2" to 7-5/8". Stocking is simplified and many installation costs are eliminated. No handling is required.

One-Piece Design

Side jambs and header are each of one piece. No need to choose various extension sections. No loose pieces to lose or damage.

Strength

The strength of 18 g. steel and the safety of 90 minute fire rating for both single and double door units.

Long Life

The long term protection of hot-dipped galvanized steel: an excellent base for the finish of your choice.

